

Ceiling Cutout: 8" (203 mm) Dia.

Reflector Trim	Frame-In Kit
8047 CLW Clear Iridescence Free, White Flange 8047 CLP Clear Iridescence Free, Polished Flange 8047 <input type="checkbox"/> Add Suffix. See options for other finishes.	S7126BU 7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam) S7132BU 7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam) S7142BU 7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam) Dimming Options: S7132B <input type="checkbox"/> or S7142B <input type="checkbox"/> CU3 Lightolier PowerSpec 3% Dimming (120/277V) J1LD3 Lutron 3% Dimming (120V) J2LD3 Lutron 3% Dimming (277V) JUM7 Mark 7 Dimming (120/277V) J1MX Mark 10 Dimming (120V) J2MX Mark 10 Dimming (277V) Other dimming product available, please consult factory
Remodeler Frame-In Kits	
7126BURM	7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam))
7132BURM	7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam)
7142BURM	7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam)

Features

- Optics:** Directional prismatic glass spread lens and Alzak® "kick" reflector direct light smoothly across and down wall. Rotates for correct orientation. Aperture cone with Iridescence Free finish.
- Socket Cup:** Snaps onto reflector neck to assure consistently correct optical alignment without tools.
- Retaining Springs:** Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
- Mounting Brackets:** 16 ga. steel. Adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
- Ballast/J-Box:** Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.
- Torsionite Springs:** Wire formed steel holds reflector/spread lens assembly snug to housing.

Electrical

Note: For ballast electrical data and latest lamp/ballast compatibility refer to "Ballast" specification sheet for complete electrical data.

UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90° C supply conductors.

Options and Accessories

Comfort Clear™ Finishes¹

Clear
Diffuse
Champagne Bronze

CCL
CCD
CCZ

Other Finishes

White
Specular Clear

WH
CL

¹Specify desired flange

W White, **P** Polished

Blank - Molded Ring

Options and Accessories (continued)

Emergency Add suffix **EM***
Chicago Plenum Add suffix **LC**
Existing/Thk. Ceiling **FA EC7***
Emergency Ltg. Kit **FA EM3E***
Fuse (slow blow) Add suffix **F**
*See Spec. Sheets: FAEC, FAEM

Mounting Bars & Accessories; see Specification Sheet MBA.
Sloped Ceiling Adapters; see Specification Sheet SCA.

Labels

UL listed for damp locations, I.B.E.W.


Alzak® is a registered trademark of ALCOA.

US Patent Pending

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A0708

Footcandles On Wall: Multiple 32W Units

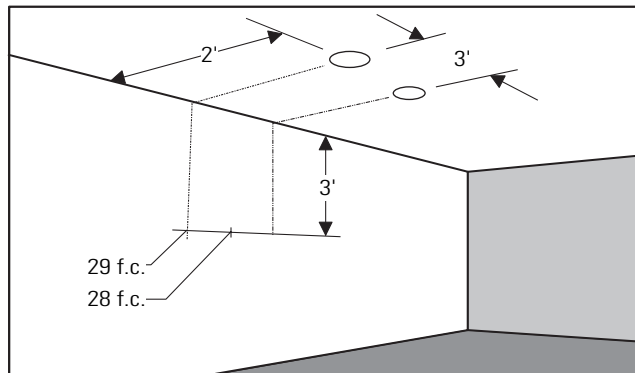

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 39 f.c. beneath units and 40 f.c. between units.

Footcandles On Wall: Multiple 42W Units

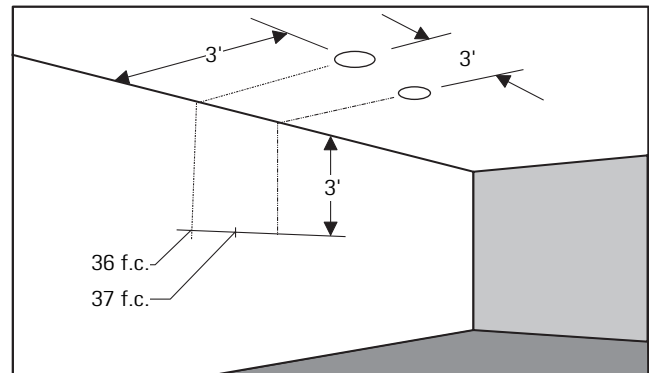

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 36 f.c. beneath units and 37 f.c. between units.

2' from Wall-2' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	38	32	38						
2	50	49	50						
3	43	43	43						
4	33	32	33						
5	25	32	25						
6	20	20	20						
7	16	15	16						
8	13	13	13						
9	11	11	11						

2' from Wall-3' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	31	16	31						
2	38	28	38						
3	29	29	29						
4	22	22	22						
5	17	17	17						
6	13	13	13						
7	11	11	11						
8	9	9	9						
9	7	7	7						

2' from Wall-2' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	61	52	61						
2	80	81	80						
3	61	62	61						
4	44	45	44						
5	32	33	32						
6	24	25	24						
7	19	19	19						
8	15	15	15						
9	13	13	13						

2' from Wall-3' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	52	25	52						
2	57	51	57						
3	40	42	40						
4	30	31	30						
5	23	23	23						
6	18	18	18						
7	14	14	14						
8	12	12	12						
9	10	10	10						

3' from Wall-3' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	10	9	10						
2	21	20	21						
3	23	23	23						
4	22	22	22						
5	19	19	19						
6	16	16	16						
7	13	13	13						
8	11	11	11						
9	10	10	10						

3' from Wall-4' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	8	6	8						
2	17	13	17						
3	18	16	18						
4	16	16	16						
5	14	14	14						
6	12	11	12						
7	10	9	10						
8	8	8	8						
9	7	7	7						

3' from Wall-3' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	16	12	16						
2	34	32	34						
3	36	37	36						
4	31	31	31						
5	25	26	25						
6	21	21	21						
7	17	17	17						
8	15	15	15						
9	13	13	13						

3' from Wall-4' On Center

Distance From Ceiling in Feet	1	2	3	4	5	6	7	8	9
1	14	8	14						
2	29	21	29						
3	28	27	28						
4	23	24	23						
5	19	20	19						
6	16	16	16						
7	13	14	13						
8	12	12	12						
9	10	10	10						

Footcandle values are averaged and rounded off and based on minimum of five units.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • A0708